

Robertshaw®

9415

DIGITAL
NON-PROGRAMMABLE
THERMOSTAT



new series!

2 Heat / 2 Cool

Incredible Digital

When it comes to non-programmable temperature control, we listened to the experts—YOU! Our 9415 takes comfort to a new level. The LCD display is clearly one of the largest in the industry, up to 80% larger than competitive models. Plus, the display is back lit, making it even easier to read in a dark room.

This model is loaded with enhanced features. The 9415 comes with permanent winter and summer setpoint memory, allowing you to save both heating and cooling temperature settings. This eliminates temperature adjustments when switching systems for seasonal requirements. And our fully adjustable differential provides increased comfort control. The 9415 is compatible with all standard 24 Volt AC multi-stage systems, up to two stage heat and two stage cool.

When you select a Robertshaw thermostat, you've made the choice of an industry partner that's been making quality products for 100 years. Come home to affordable comfort. Come home to RobertshawSM.



Features and Benefits

Larger Back Lit Display

Makes viewing and setting the temperature easy and accurate.

Winter and Summer Permanent Setpoint Memory

Allows you to save both heating and cooling temperature settings.

Automatic Compressor Short Cycle Protection

A system safeguard. Reduces wear and tear of HVAC equipment.

Worry-Free Memory Storage

Even during power outages, the thermostat maintains setpoint and programmed parameters.

Adjustable 1st and 2nd Stage Temperature Differential

Maintains optimal customer comfort.

O & B Terminals

Greater system flexibility, zoning compatible.

Zone System Compatible

In zoning applications where temperature is precisely controlled, the thermostat acts as a sensor within the system.

Quick Wire Terminal Block

Fast and easy installation. Uses sturdy wire clamps — no wrap-around of screws.

Toll-Free Assistance

Toll-Free Technical Service number printed right on the thermostat provides immediate assistance.



Technical service available:

1-800-445-8299

M-F 7:00 a.m. - 5:30 p.m. CST



24 VAC POWERED

Robertshaw®

9415

DIGITAL
NON-PROGRAMMABLE
THERMOSTAT




GAS ELECTRIC OIL

new series!

Terminal Designations

2 Heat / 2 Cool

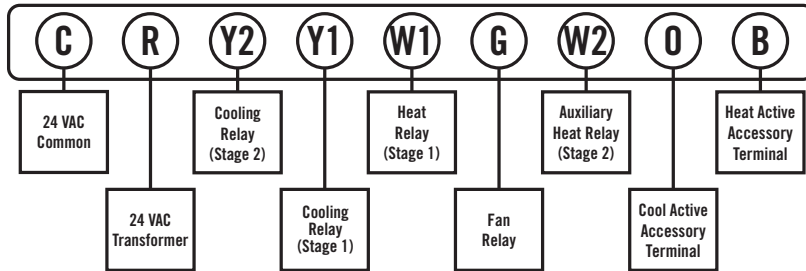

THE ROBERTSHAW 9415 REPLACES:

Robertshaw	9515
White-Rodgers Company*	1F83-211

* Verify specific application requirements before substitution.

Specifications

Electrical rating: 24 Volt AC (18-30 VAC)

1 amp maximum load per terminal

3 amp total maximum load

(all terminals combined)

Temperature control range: 45° - 90°F (7° - 32°C)

Power: 24 VAC

Accuracy: +/-1°F (+/- .5°C)

System configurations: Multi-stage gas, oil, or electric heating/cooling systems

(up to two stage heat, two stage cool)

Terminations: C, R, Y2, Y1, W1, G, W2, O, B

Shipping Information

Indiv. Ctn. Dim.: 6.75" x 4.375" x 1.625"

Master Ctn. Qty.: 6

Master Ctn. Dim.: 9.25" x 5.625" x 7.625"

Master Ctn. Cu. Ft.: .23

Master Ctn. Wt.: 4.0 lbs.

Max. Pallet Qty.: 1170

Max. Pallet Dim.: 40" x 48" x 48"

Max. Pallet Cu. Ft.: 53.33

Max. Pallet Wt.: 835 lbs.

Other Multi-Stage Heat / Cool Thermostats

9615: Programmable, 7 Day

9715i: Deluxe Programmable, 7 Day

Invensys

Controls Americas
515 South Promenade Avenue
Corona California 92879-1736 USA
Telephone +1 800 951 5526 Facsimile +1 630 260 7299
icccustomerservice@invensys.com
www.icca.invensys.com
©2005 Controls Americas 1/05 - #150-1689D

Distributed by: