

Robertshaw®

9550

DELUXE
NON-PROGRAMMABLE
THERMOSTAT



GAS



ELECTRIC



OIL



HEAT PUMP



IDEAL FOR LIGHT COMMERCIAL APPLICATIONS

Features and Benefits

Quick Connect Wiring

Fast and easy installation. Uses sturdy wire clamps – no wrap-around of screws.

Auto Changeover

Automatically adjusts between heating and cooling cycles to maintain optimal comfort.

Large Back Lit Display

Allows for easy viewing in dark hallways or at night.

Lighted System Status Indicators

Enables you to check system status at a glance.

Worry-Free Memory Storage

Even during power outages, the thermostat maintains setpoint and programmed parameters.

Adjustable Temperature Differential

Maintains optimal customer comfort.

Automatic Compressor Short Cycle Protection

A system safeguard. Reduces wear and tear of HVAC equipment.

O & B Terminals

Greater system flexibility, zoning compatible.

Zone System Compatible

In zoning applications where temperature is precisely controlled, thermostat acts as a sensor within the system.

Toll-Free Assistance

Toll-Free Technical Service number printed right on the thermostat provides immediate assistance.

1 Heat / 1 Cool
with Auto Changeover

new series!

Go Beyond Digital

We work hard at finding logical solutions to fit your needs. Our Quick Connect Wiring feature can save you up to 15 minutes on every installation. And customers will appreciate Auto Changeover, which automatically switches between heating and cooling to maintain optimal comfort. Coupled with Fully Adjustable Differentials, the 9550 will automatically maintain a comfortable environment year round.

Compatibility? No question. The 9550 is compatible with all standard 24 Volt AC heating and cooling systems, including single stage heat pump systems. Three LEDs indicate heating, cooling and fan operation.

When you select a Robertshaw thermostat, you've made the choice of an industry partner that's been making quality products for over 100 years.



Technical service available:

1-800-445-8299

M-F 7:30 a.m. - 5:30 p.m. CST



Robertshaw®

9550

DELUXE
NON-PROGRAMMABLE
THERMOSTAT



GAS



ELECTRIC




OIL



HEAT PUMP

Terminal Designations

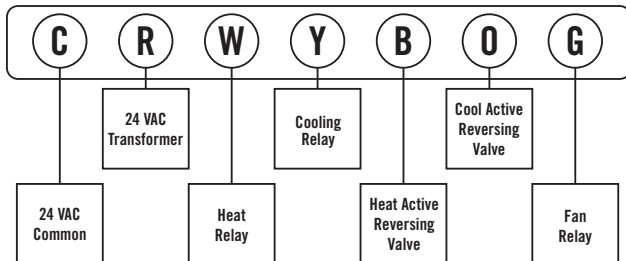

1 Heat / 1 Cool
with Auto Changeover

new series!

THE ROBERTSHAW 9550 REPLACES:

Honeywell, Inc.*	T8501
White-Rodgers*	1586-241

* Verify specific application requirements before substitution.

Specifications

Electrical rating: 24 Volt AC (18-30 VAC)

1 amp maximum load per terminal

3 amp total maximum load (all terminals combined)

Temperature control range: 45° - 90°F (7° - 32°C)

Accuracy: +/-1°F (+/- .5°C)

Power source: 24 VAC

System configurations: Single-stage gas, oil or electric heating / cooling systems (or single stage heat pump)

Terminations: C, R, W, Y, B, O, G

1st Stage Differential: 0.5° - 3° F

Shipping Information

Indiv. Ctn. Dim.: 6.75" x 4.375" x 1.625"

Master Ctn. Qty.: 6

Master Ctn. Dim.: 9.25" x 5.625" x 7.5"

Master Ctn. Cu. Ft.: .23

Master Ctn. Wt.: 4.0 lbs.

Max. Pallet Qty.: 1260

Max. Pallet Dim.: 40" x 48" x 45.3"

Max. Pallet Cu. Ft.: 50.3

Max. Pallet Wt.: 835 lbs.

Other Single-Stage Heat / Cool Thermostats

988-1: Mechanical

9200: Mercury-Free Deluxe Mechanical

9600: Programmable, 5-2 Day

9610: Programmable, 7 Day

9700i: Deluxe Programmable, 7 Day

9701i: Deluxe Programmable, 7 Day

Distributed by:

invensys®

Climate Controls Americas
515 South Promenade Avenue
Corona California 92879-1736 USA
Telephone +1 800 951 5526 Facsimile +1 630 260 7299
iccacustomerservice@invensys.com
Technical Service Telephone +1 800 445 8299
Technical Service Facsimile +1 630 260 7243
technicalservice@invensys.com
www.icca.invensys.com
©2004 Climate Controls Americas 4/04 - #150-1705B